
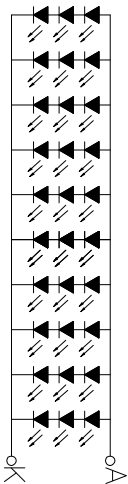


Front View

Right Side View

Back View

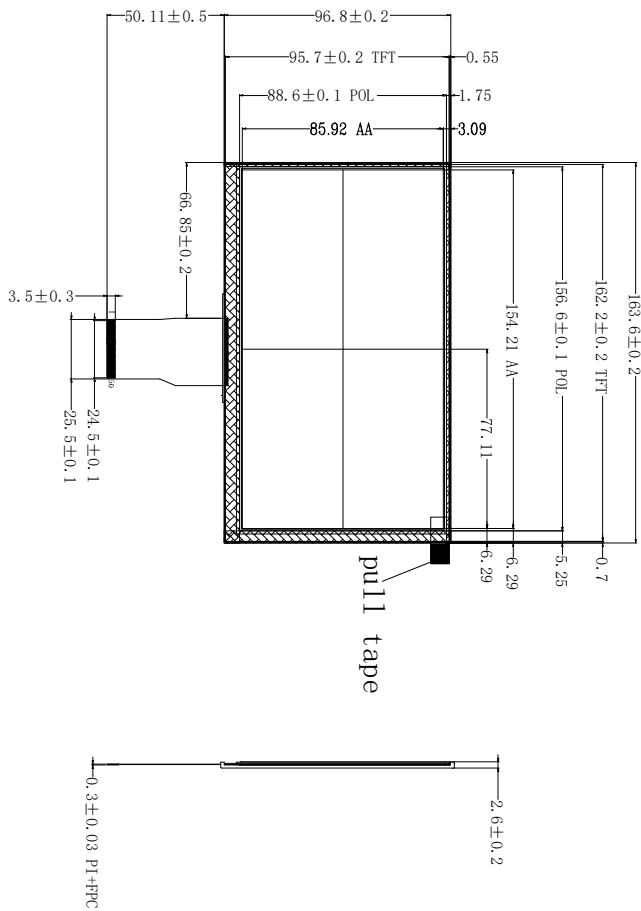

I<sub>F</sub>=200mA, V<sub>F</sub>=10.5V (MAX)  
LED CIRCUIT DIAGRAM

Display Type	TFT/NOBREMALLY Block/TRANSMISSIVE
Display Resolution	1024(R,G,B)*600
Viewing Angle	All(ips)
CCF Controller/Driver	
Operation Temperature	-20°C ~ 70°C
Storage Temperature	-50°C ~ 80°C
Backlight Speciality	White LED Backlight
Unmarked tolerance	±0.2
Materials and processes comply with "RoHS" standards	

REV	DESCRIPTION	DATE	NAME
1	first VO	2021.11.23	helen

Part No:	R700009-102460RZ
Customer No:	
APPROVED BY:	CHECKED BY:
DATE:	DATE:
NAME:	NAME:

Rondeli Electronics Co., Ltd

Pin No.	Pin Name
1	LED-A
2	LED-A
3	LED-R
4	LED-R
5	GND
6	VCOM
7	D/D0
8	M/D0E
9	DE
10	VSD
11	HSD
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	D/Ck
38	GND
39	SHE.R
40	LEPDM
41	VGH
42	VGL
43	AVD0
44	RSFB
45	NC
46	VCOM
47	D/TTH
48	GND
49	NC
50	NC

PROJECTION: 100%  
SCALE: 1:1 UNIT: mm  
SHEET: 1 of 1