



FRONT VIEW

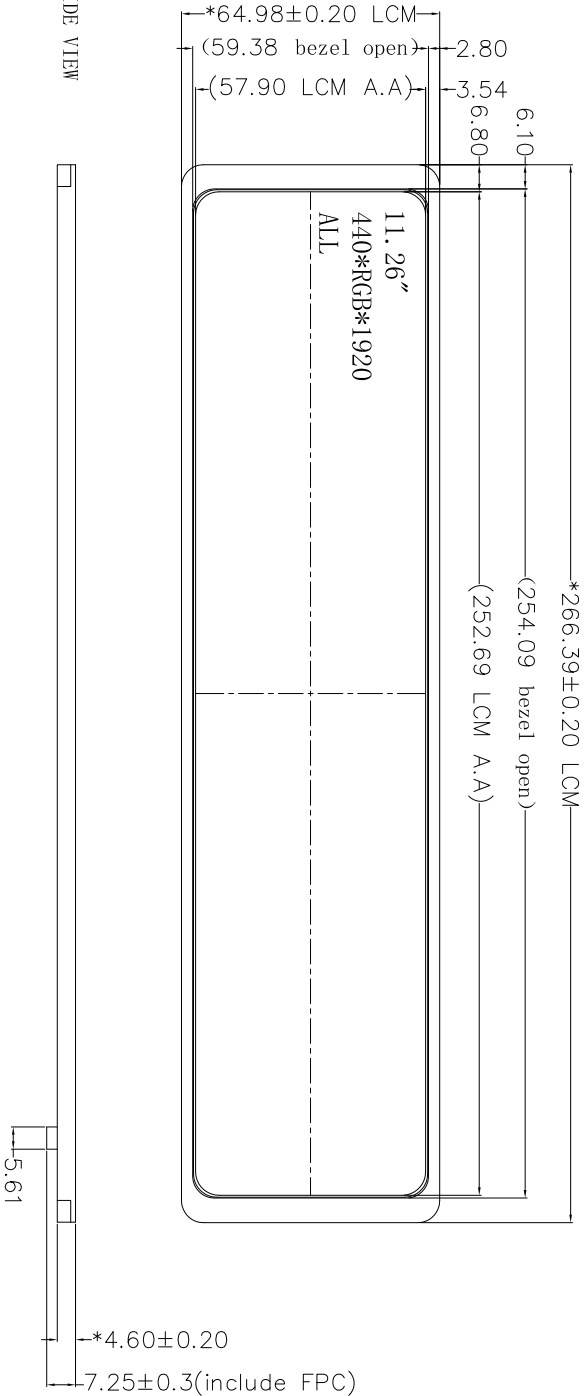

RIGHT SIDE VIEW

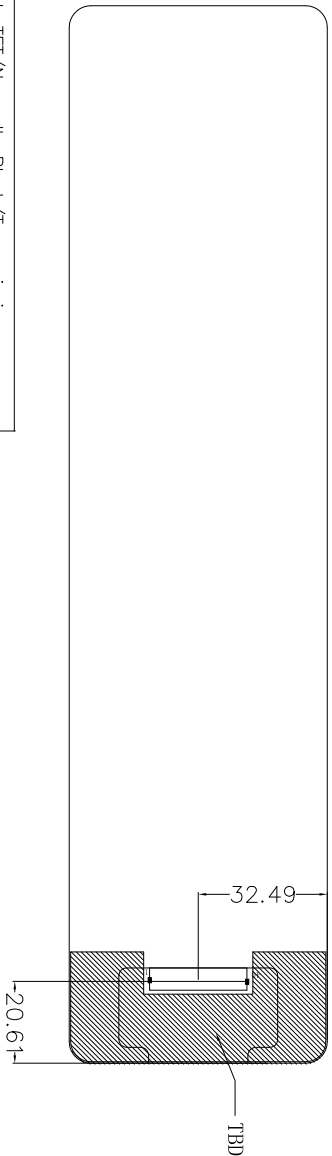


REAR VIEW

PIN	Symbol
1	GND
2	D0P
3	D0N
4	GND
5	D1P
6	D1N
7	GND
8	CLKP
9	CLKN
10	GND
11	D2P
12	D2N
13	GND
14	D3P
15	D3N
16	GND
17	GND
18	NC
19	NC
20	NC
21	SDA-NC
22	SCL-NC
23	NC
24	RSTB
25	STBYB
26	NC
27	GND
28	BL-K(-)
29	BL-K(+)
30	GND
31	NC
32	GND
33	GND
34	NC
35	BL-A(+)
36	BL-A(-)
37	GND
38	VDD-3V3
39	VDD-3V3
40	NC

MIPPI

Display Type	7inch TFT/Normally Black/Transmissive
Display Resolution	DOTS:440*(R,G,B)*1920
Viewing Angle	ALL(IPS)
LCD Controller/Driver IC	SC7707
Operation Temperature	-20°C ~ 70°C
Storage Temperature	-30°C ~ 80°C
Backlight Speciality	White LED=8S2P If=80mA V _F =24.0V(I _{yp})23.2V~25.6V



LED CIRCUIT DIAGRAM:

Unmarked tolerance: ±0.2mm	
Materials and processes comply with "RoHS" standards	

Rondeli Electronics CO., Ltd

Part No:	R113001-4401920MT	VER:V0
Customer No:		
APPROVED BY:		
CHECKED BY:		
DRAWN BY:		
DATE:	2020.12.13	Helien
DESCRIPTION:		
REV:		
SCALE:1:1		
SHEET: 1 of 1		