
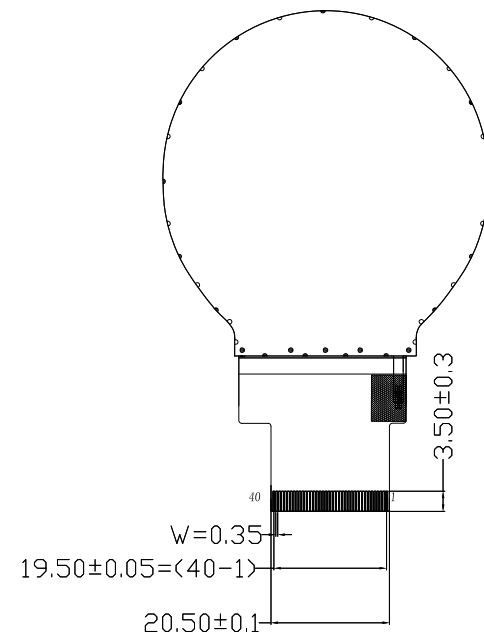
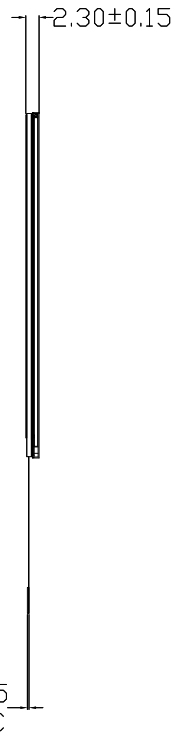


Front View

Right Side View

Back View

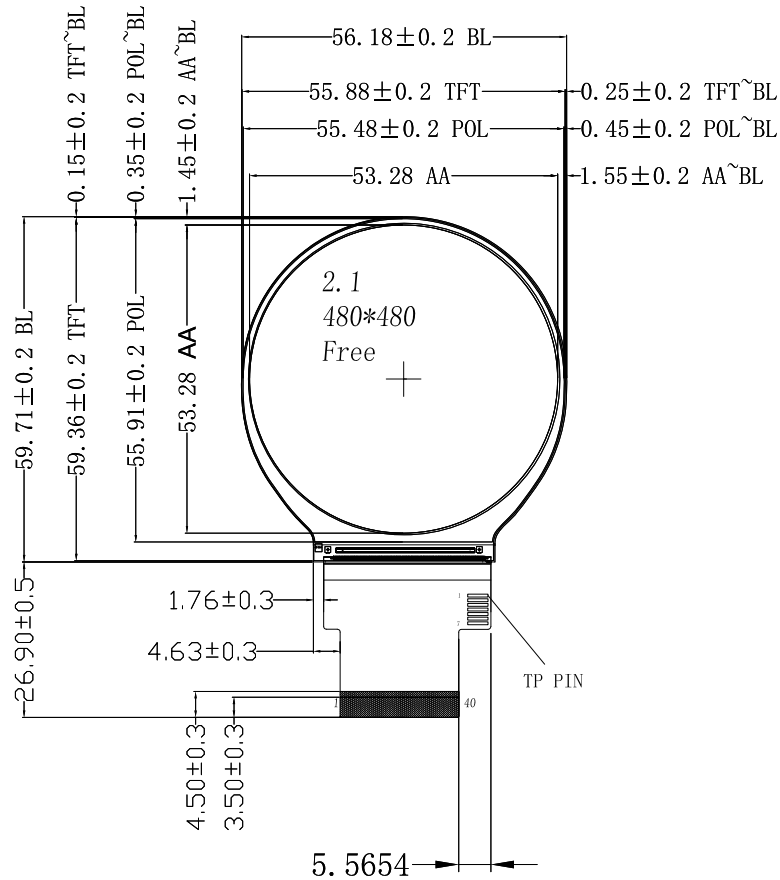


FPC unfold shipment

TP PIN

Pad No.	Pad Name
1	LED-A
2	LED-K
3	LED-K
4	GND
5	VCI
6	RESET
7	NC
8	NC
9	SDA
10	SCK
11	CS
12	PCLK
13	DE
14	VSYNC
15	HSYNC
16	B0
17	B1
18	B2
19	B3
20	B4
21	B5
22	G0
23	G1
24	G2
25	G3
26	G4
27	G5
28	R0
29	R1
30	R2
31	R3
32	R4
33	R5
34	GND
35	TP-INT
36	TP-SDA
37	TP-SCL
38	TP-RESET
39	TP-VCI
40	GND

1	GND
2	TP-INT
3	TP-SDA
4	TP-SCL
5	TP-VCI
6	TP-RESET
7	TP-VCI

Display Type	TFT/NORMALLY Black/TRANSMISSIVE
Display Resolution	480(R.G.B)*480
Viewing Angle	ALL
LCD Controller/Driver	ST7701S
Operation Temperature	-20°C ~ 70°C
Storage Temperature	-30°C ~ 80°C
Backlight Speciality	White LED Backlight(1S4P) IF=80mA, VF=2.8V~3.4V(TYP=3.2V)
Unmarked tolerance: ±0.2mm	
Materials and processes comply with "RoHS" standards	



Voltage : VF=2.8V~3.4V
Current : IF=80mA

LED CIRCUIT

Rondeli Electronics Co.,Ltd.

Part NO:	R21001-480480RZ	VER:V0
Customer NO:		PROJECTION:
APPROVED BY:	CHECKED BY:	DRAWN BY:
SCALE:1:1	UNIT: mm	SHEET: 1 OF 1

REV	DESCRIPTION	DATE	NAME
△	first V0	2021.10.23	Helan