


Front View



Right Side View

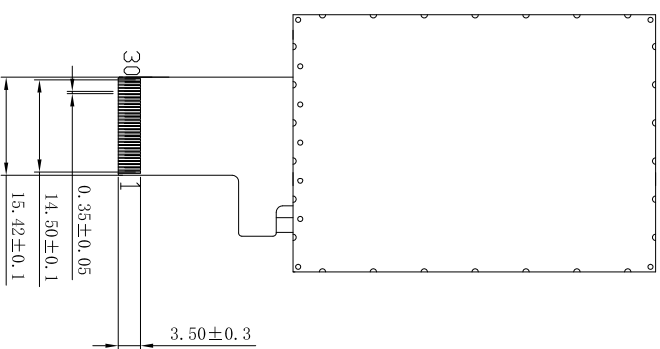


Back View

1	LEDA
2	LEDK
3	GND
4	VCI 3.3V
5	IOWCC 1.8V
6	GND
7	B17
8	B16
9	B15
10	B14
11	B13
12	B12
13	B11
14	B10
15	B7
16	B6
17	B5
18	B4
19	B3
20	B2
21	B1
22	B0
23	GND
24	RD
25	WR
26	RS
27	CS
28	IM0
29	RESET 1.8V
30	GND

IM0=0, 16bit-MCU

IM0=1, 8bit (DB10:DB17)-MCU



Voltage :  $V_F=2.8V \sim 3.4V$   
Current :  $I_F=80mA$

LED CIRCUIT

Display Type	Grinch TFT/NORMALLY WHITE/TRANSMISSIVE
Display Resolution	240(R,G,B)*320
Viewing Angle	12 o'clock
LCD Controller/Driver	GC9306N
Operation Temperature	-20°C ~ 70°C
Storage Temperature	-30°C ~ 80°C
Backlight Speciality	White LED Backlight(1S4P) $I_F=80mA, V_F=2.8V \sim 3.4V(TYP=3.2V)$
Unmarked tolerance:	±0.2mm
Materials and processes comply with "RoHS" standards	

REV				
	First VO	2021.10.23	Helon	
	DESCRIPTION	DATE	NAME	

Part NO:	R24017-240320U7	VER:10
Customer NO:		PRODUCTION:
APPROVED BY:	CHECKED BY:	DRAWN BY:
		SCALE: 1:1
		UNIT: mm
		SHEET: 1 of 1

Rondeli Electronics CO.,Ltd

1

2

3

4

5

6