




Front View

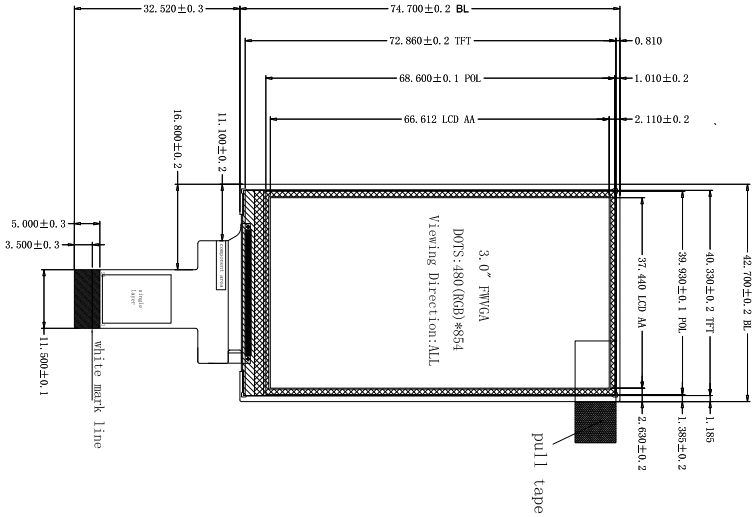

Right Side View

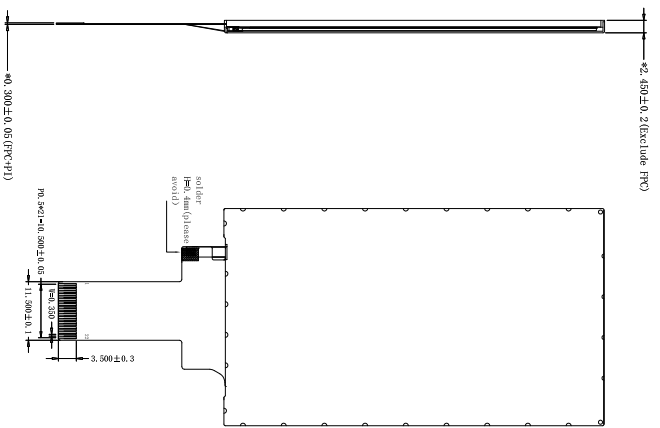

Back View

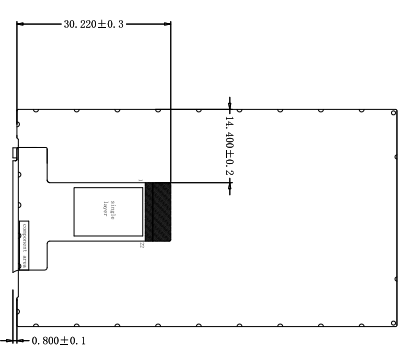


Back View

1	GND
2	GND
3	DON
4	DOP
5	GND
6	GND
7	CLKN
8	CLKP
9	GND
10	D1N
11	D1P
12	RESET
13	GND
14	GND
15	I0VCC
16	VCC
17	GND
18	TE
19	GND
20	LEDK
21	LEDA
22	GND

FPC bending diagram  
FPC unfold shipping

D

Display Type	Single TFT/NORMALLY Black/TRANSMISSIVE
Display Resolution	4800(R,G,B)*854
Viewing Angle	ALL(IPS)
LCD Controller/Driver	ST1701S
Operation Temperature	-20°C ~ 70°C
Storage Temperature	-30°C ~ 80°C
Backlight Speciality	White LED Backlight
Unmarked tolerance:	±0.2mm
Materials and processes comply with "RoHS" standards	



REV	DESCRIPTION	DATE	NAME
1	First VO	2021.11.23	Helon

Rondeli Electronics Co., Ltd.			
Part NO:	R30070-480854MZ	VER:10	PRODUCTION
Customer NO:			
APPROVED BY:	CHECKED BY:	DRAWN BY:	SCALE: 1:1
			INVT: mm
			SHEET: 1 of 1

1

2

3

4

5

6

D

C

B

A