




Front View

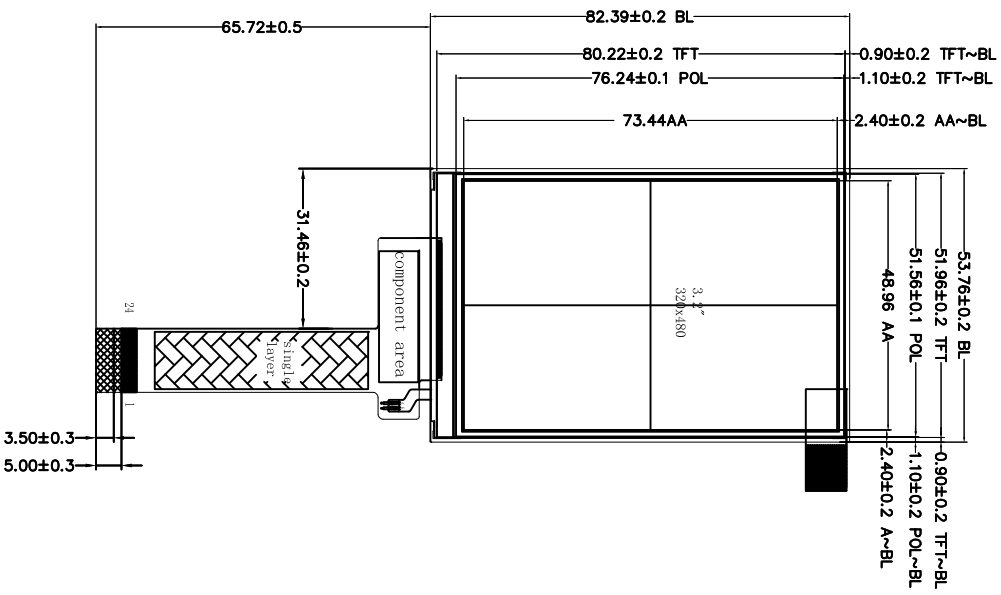


Right Side View

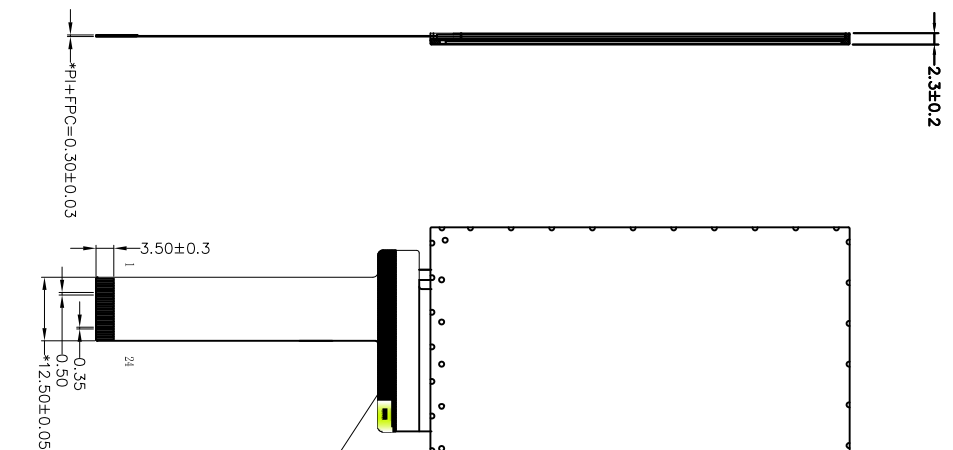

Back View

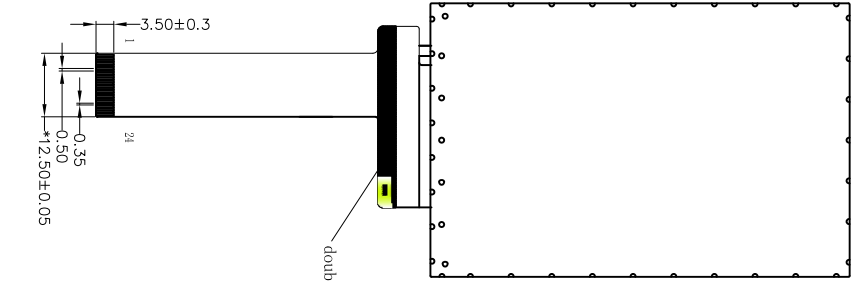

Back View

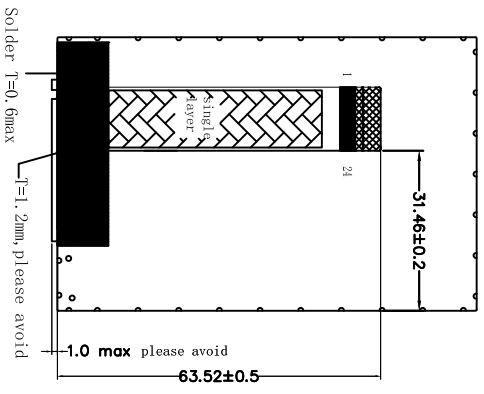

FPC bending diagram

Pin	Symbol
1	IM0/NC
2	DPOD(2P)
3	LDVDD(I/V)
4	IM1/NC
5	RESET
6	GND
7	NC
8	NC
9	LED-
10	LED+
11	GND
12	GND
13	NC
14	NC
15	GND
16	TDPO
17	TDNO
18	GND
19	NC
20	NC
21	GND
22	TCP
23	TON
24	GND

D

Display Type	TFT/NORMALLY Black/TRANSMISSIVE
Display Resolution	320(R,G,B)*180
Viewing Angle	ALL(IPS)
LCD Controller/Driver	ILI9488
Operation Temperature	-20°C ~ 70°C
Storage Temperature	-30°C ~ 80°C
Backlight Speciality	White LED Backlight

Unmarked tolerance: ±0.2mm
Materials and processes comply with "RoHS" standards

PM(A) BACKLIGHT CIRCUIT DIAGRAM
VF=1.6-1.9, 8V IF=20mA

Rondeli Electronics Co., Ltd

Part NO:	R35032-320480MZ	VER:1.0
Customer NO:		PROJECTION: 10°
APPROVED BY:		SCALE: 1:1
CHECKED BY:		UNIT: mm
DATE	2021.11.23	DESIGNER: Helon
NAME		DRAWN BY:
DESCRIPTION	First VO	SHEET: 1 of 1

1

2

3

4

5

6