




Front View

Right Side View


Back View

Back View

1	LEDK
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSINC
34	DEN
35	NC
36	GND
37	RESET
38	SDI
39	SCL
40	CS

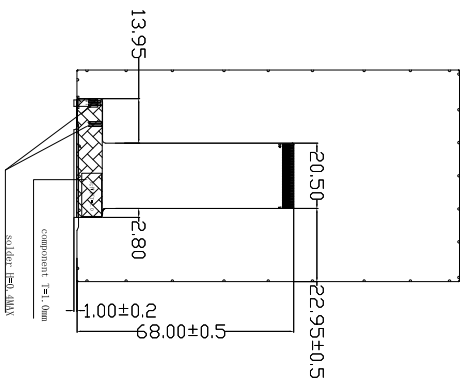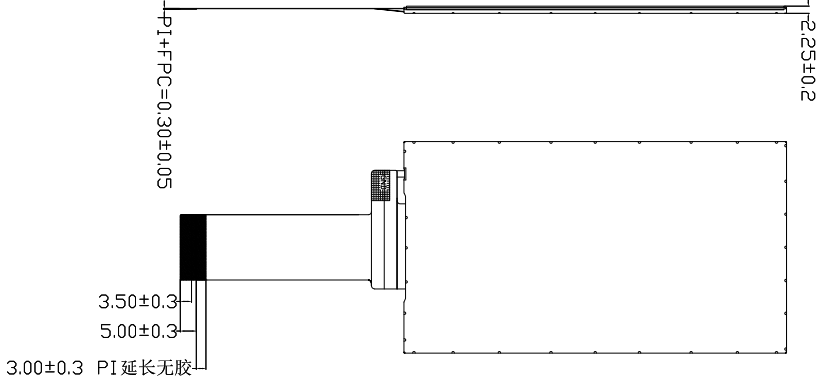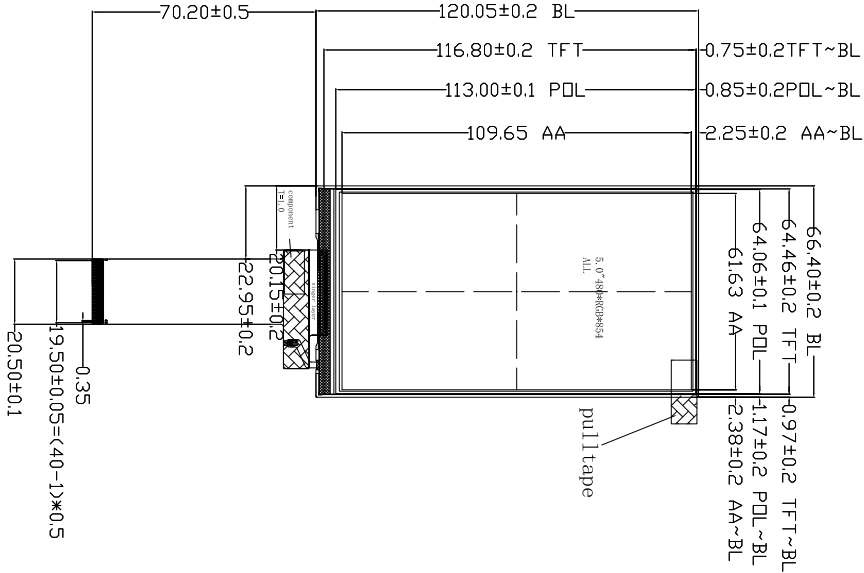

FPC bending shipping diagram



BL DIAGRAM

Voltage : VF=16.8V~20.4V
Current : IF=20mA

Display Type	Single TFT/NORMALLY Black/TRANSMISSIVE
Display Resolution	480(R,G,B)*854
Viewing Angle	ALL(PS)
LCD Controller/Driver	ST7701
Operation Temperature	-20°C ~ 70°C
Storage Temperature	-30°C ~ 80°C
Backlight Specialty	White LED Backlight(6S2P=12diels) IF=40mA, VF=16.8V~20.4V(TYP=19.2V)
Unmarked tolerance: ±0.2mm	
Materials and processes comply with "RoHS" standards	

REV	DESCRIPTION	DATE	NAME
1	First VO	2021.10.23	Helton

Rondeli Electronics CO.,Ltd			
Part NO:	R50399-480854RZ	VER:10	
Customer NO:		PROJECTION: 1:1	
APPROVED BY:	CHECKED BY:	DRAWN BY:	SCALE: 1:1
DATE		NAME	SHEET: 1 of 1