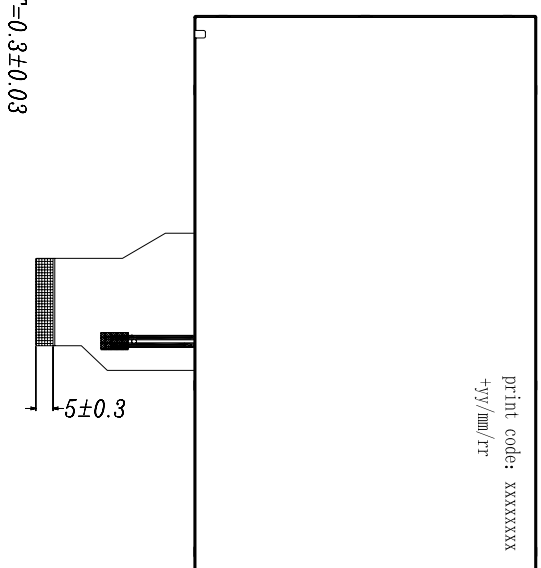
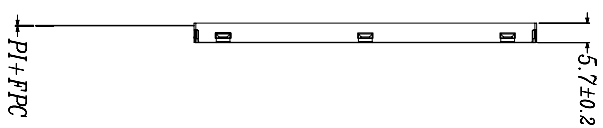
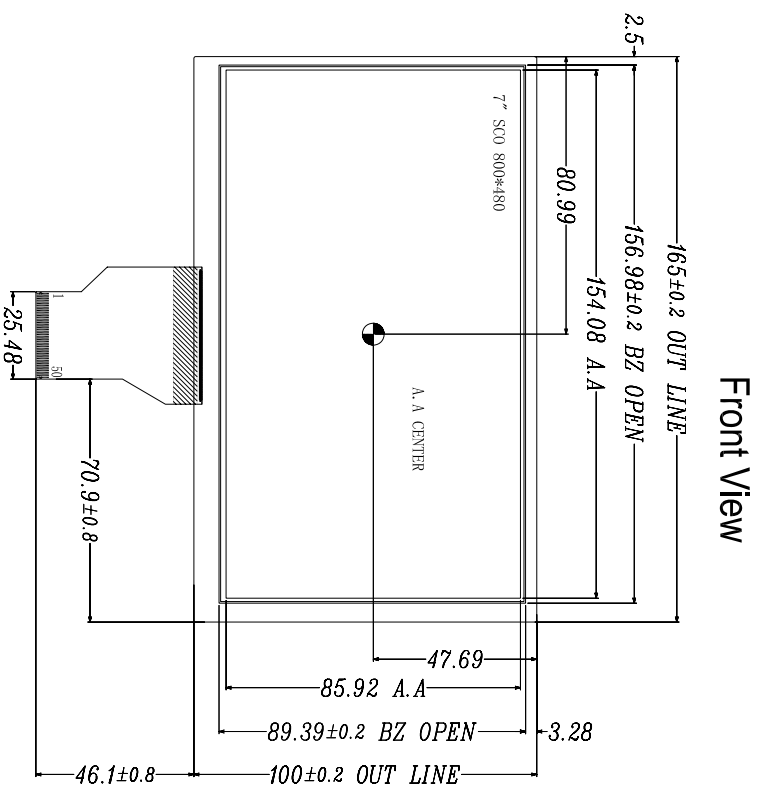


PIN	SYMBOL
1	VEE+
2	VED+
3	VEE-
4	VED-
5	GND
6	VCOM
7	DVID
8	MODE
9	DE
10	VS
11	HS
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	R0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	CLK
38	GND
39	L/R
40	U/D
41	VGH
42	VGL
43	AVDD
44	RSET
45	NC
46	VCOM
47	DITHB
48	GND
49	NC
50	NC

Display Type	TF/INDEMNALLY White/TRANSMISSIVE
Display Resolution	DOTS:800(R,G,B)*480
Viewing Angle	12 o'clock
LCD Controller/Driver	--
Operation Temperature	-20°C ~ 70°C
Storage Temperature	-30°C ~ 80°C
Backlight Speciality	White LED Backlight(3SPF) If=120mA, Vf=9.0V~10.5V(17V=9.6V)

A (4:1)

Backlight Speciality	White LED Backlight Assembly If=120mA, Vf=9.0V~10.5V(TYP=9.6V)
Insulation (thickness: $\pm 0.2\text{mm}$)	
Materials and processes comply with RoHS standards	

△	first YO	2021. 09. 27	10:07
REV	DESCRIPTION	DATE	NAME

Rondeli Electronics CO., Ltd				
Part No:	R70001-800480RZ		VER:10	
Customer No:				
APPROVED BY:	CHECKED BY:	DRAWN BY:	PROJECTOR:  	
			SCALE: 1:1	UNIT: mm
			SHEET: 1	OF 1

PROJECTION: 	
SCALE: 1:1	UNIT: mm
SHEET: 1 OF 1	