
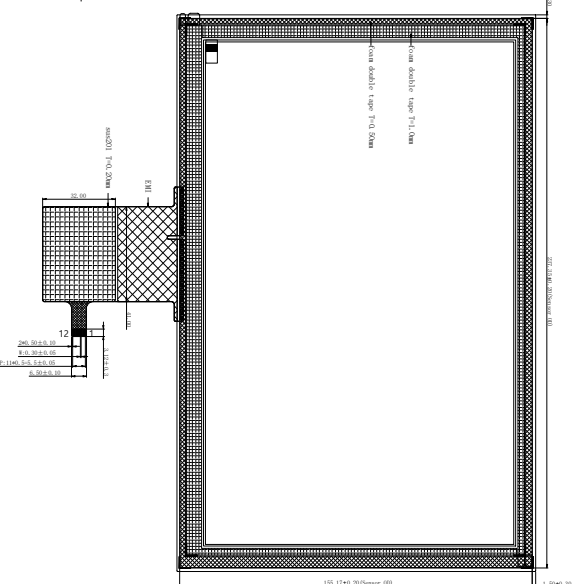
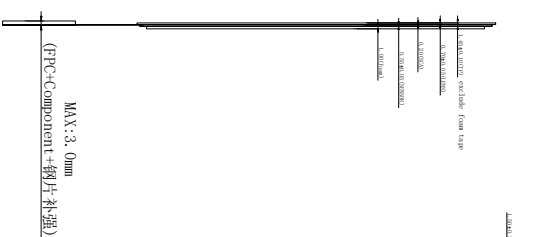


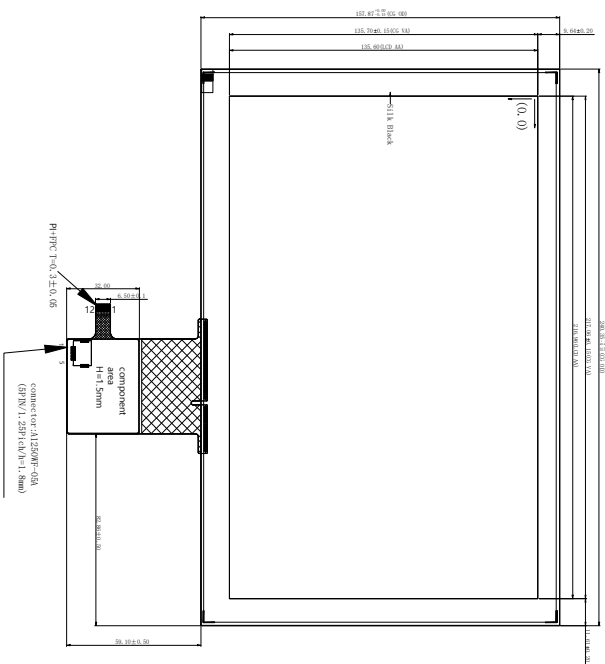

connector: A1250NF-05a
(5P IN/1, 25P OUT/h=1, 8mm)

Technical requirements:

1. structure: G-6,
2. transmittance: $\geq 86\%$ (550nm),
3. All unmarked tolerance: $\pm 0.15\text{mm}$
4. IC: IL12511
5. toughened degree: 110g steel ball, 40cm drop height is not broken.
6. surface hardness Test: $\geq 6H$ (pencil hardness test)
7. CG unmarked hole and edge $\leq 0.20\text{mm}$.

USB interface	
PIN	Symbol
1	VCC 5.0V
2	D-
3	D+
4	GND
5	GND

Pin	Symbol	Pin	Symbol
1	VCC	7	NC
2	RST	8	NC
3	INT	9	NC
4	SCL	10	D+
5	SDA	11	D-
6	GND	12	5V

Operation Temperature	-20°C ~ 70°C
Storage Temperature	-30°C ~ 80°C

Unmarked tolerance: ± 0.2

Materials and processes comply with "RoHS" standards

Rondeli Electronics Co., Ltd									
Part No:		VER:V0							
RPPB10107A0									
Customer MO:		APPROVED BY:		CHECKED BY:		DRAWN BY:		FIRST TO	
								DATE	
								NAME	
								REV	
								DESCRIPTION	
								1 OF 1	
								SHEET	
								SCALE:1:1	
								UNIT: mm	
								PREDICTION: 	