



Front View





Right Side View

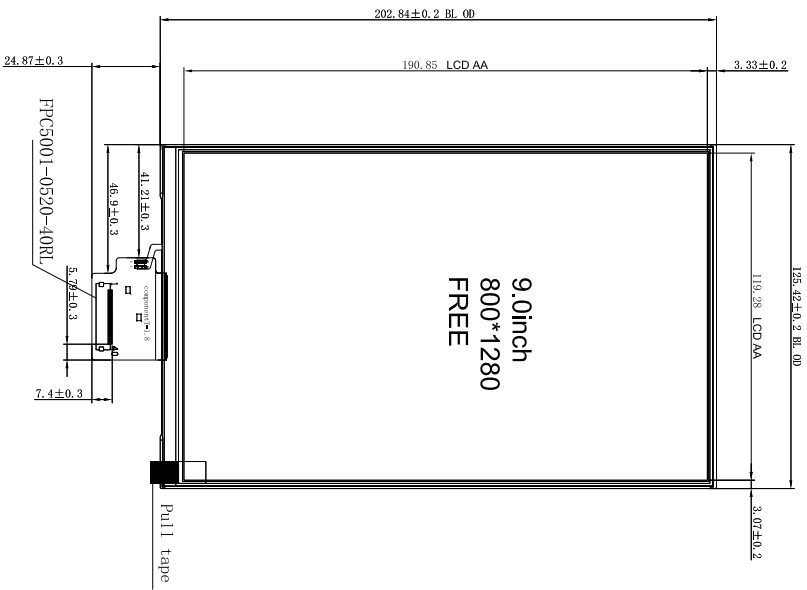

Back View

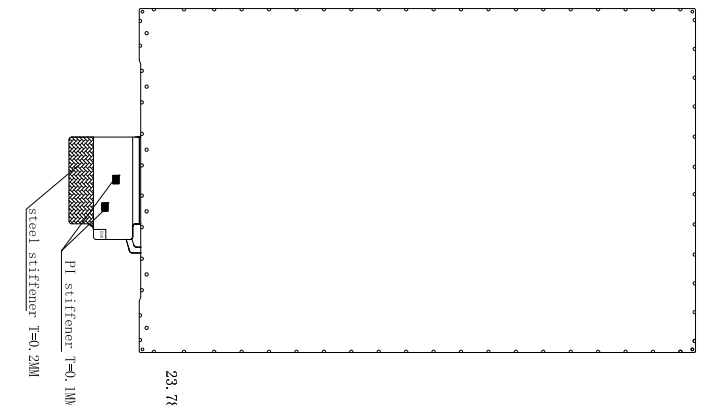

Back View

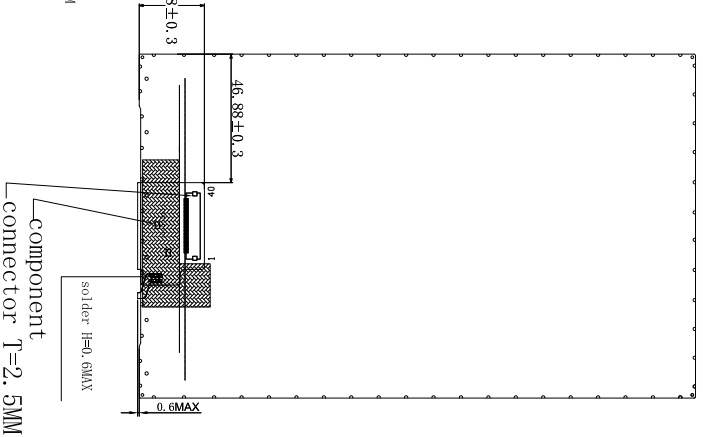

VF:13.5-17.0V IF:120mA
LED=SS6P

Backlight LED Circuit Diagram

Display Type	9inch TFT/ANALOG BACKLIT/TRANSMISSIVE
Display Resolution	DOTS:800(RGB)*1280
Viewing Angle	ALL (IPS)
LCD Controller/Driver	--
Operation Temperature	-20°C ~ 70°C
Storage Temperature	-30°C ~ 80°C
Backlight Speciality	White LED Backlight(SS6P) IF=120mA, VF=13.5V~17.0V(VTP=16.0V)
Unmarked tolerance:	±0.2mm
Materials and processes comply with "RoHS" standards	

Pin No. Pin Name

1	NC
2	VDD1 1.8V
3	VDD 2.8V
4	NC
5	RESET 1.8V
6	NC
7	GND
8	D2N
9	D2P
10	GND
11	D1N
12	D1P
13	GND
14	CLKN
15	CLKP
16	GND
17	D0N
18	D0P
19	GND
20	D3N
21	D3P
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	NC
29	NC
30	GND
31	LEDP
32	LEDP
33	NC
34	NC
35	NC
36	NC
37	NC
38	NC
39	LEDA
40	LEDA

Rondeli Electronics CO.,Ltd

Part NO:	R90006-8001280MZ	VER:10
Customer NO:		PRODUCTION
APPROVED BY:	CHECKED BY:	DRAWN BY:
2021.09.27	Helon	SCALE:1:1
DATE	NAME	UNIT: mm
REV	DESCRIPTION	SHEET: 1 of 1